


HAST ACCELERATED AGING CHAMBER




Mobile phone scan
More product information

Energy Conservation

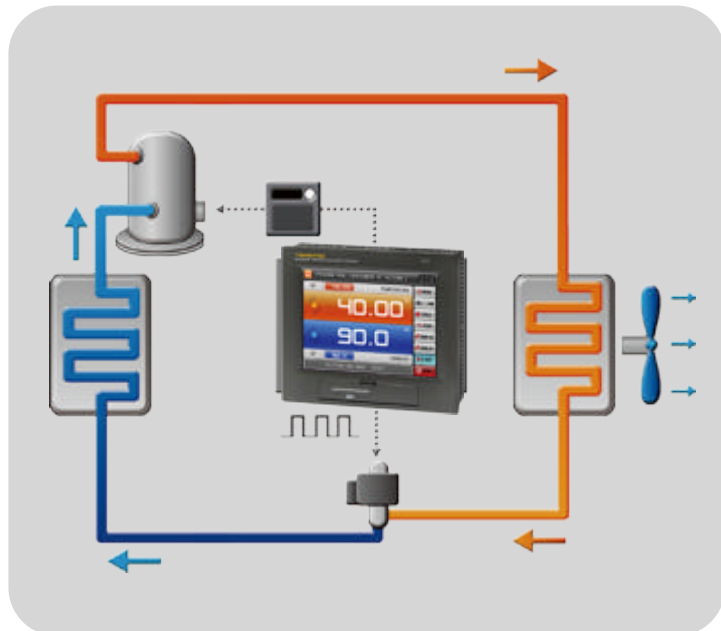

Remote network system

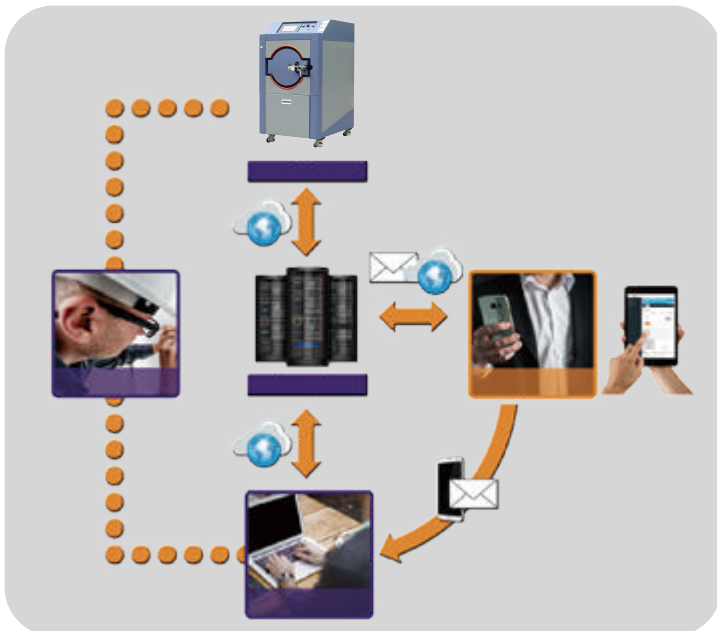

Circuit System



SANWOOD®
environment test chamber



● Specifications

Model		SM-PCT-250-A	SM-PCT-300-A	SM-PCT-400-A
Temperature	Temperature control range	105.0℃～155.0℃(A:132℃;B:142.9℃; C:155℃;)		
	Pressure control range	normal pressure +0.2～2.0kg/cm2、normal pressure +0.2～3.0kg/cm2、normal pressure +0.2～3.5kg/cm2		
	Temperature fluctuation	±2.0℃		
	Temperature uniformity	±3.0℃		
Humidity	Humidity control range	65.0%RH～100.0%RH		
	Humidity fluctuation	±2.0% RH		
	Humidity uniformity	±5.0%RH		
Material / components	Internal material	Stainless steel(SUS316)		
	External material	Stainless steel(SUS304)		
	Heat insulating material	100mm thickness mineral wool		
	Fan	Impeller Fan		
	Compressor	France Tecumseh		
	Condenser	Air cooling, water cooling		
	Refrigerant	R404A		
	Evaporator	Air-cooled plate fin cooler		
	Heater	Nickel chromium alloy heating wire		
Size	Inner size(mm)	Φ25*450(D)	Φ30*450(D)	Φ40*500(D)
	Outer size(mm)W×D×H	560*105*1250	660*105*1250	760*1150*1350
Operating ambient temperature		+5 ~ 35℃		
Controller		SANWOOD SH-5500		

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website