



HIGH TEMPERATURE OVEN



Energy Conservation

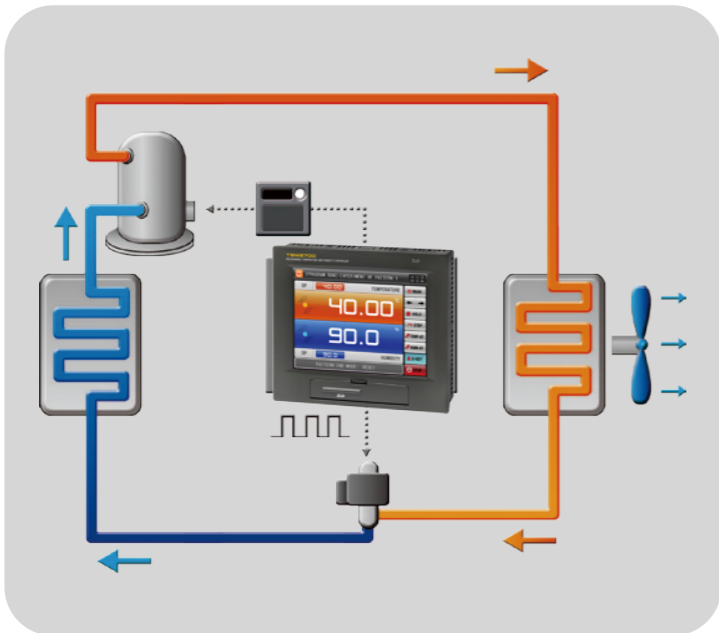

Remote network system

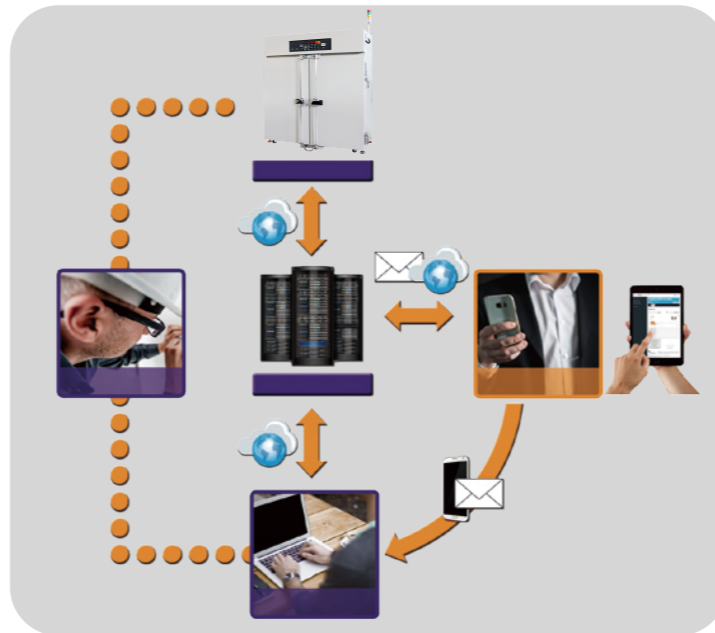

Circuit System



● Specifications

| Model | SM-G-1000-DA | SM-G-1800-DA | SM-G-2520-DA | SM-G-3600-DA | SM-G-5000-DA | SM-G-8000-DA | |
|--------------|---|--|----------------|----------------|----------------|----------------|----------------|
| Temperature | Temperature range | RT°C~300°C (A:25°C~200°C;B: 25°C~300°C;) | | | | | |
| | Temperature fluctuation | ±0.5°C | | | | | |
| | Heating rate | 25.0°C~100.0°C within 8 mins 6.0~10.0°C/min | | | | | |
| | Temperature uniformity | ±2.0°C (25.0°C~100.0°C) ±2.5°C (100.1°C~200.0°C) | | | | | |
| Material | Internal material | Adopts 1.2mm thickness stainless steel(SUS304) | | | | | |
| | External material | Adopts 1.2mm thickness Cold rolled steel sheet / powder spraying | | | | | |
| | Heat insulating material | 100mm thickness mineral wool | | | | | |
| | Fan | Centrifugal blower | | | | | |
| Heater | Nickel chromium alloy heating wire | | | | | | |
| Size | Inner size(mm) W*H*D | 1000*1000*1000 | 1000*1500*1200 | 1200*1500*1400 | 1200*2000*1500 | 1500*1800*1850 | 2000*2000*2000 |
| | Outer size(mm) W*H*D | 1200*1550*1450 | 1200*2000*1650 | 1400*2000*1850 | 1400*2350*1950 | 1700*2150*2300 | 2300*2450*2600 |
| | Volume (L) | 1000L | 1800L | 2520L | 3600L | 5000L | 8000L |
| Power supply | 380V AC 50/60Hz | | | | | | |
| Controller | Standard: South Korea TEMI -1500 Optional: South Korea TEMI - 2500, South Korea TEMI - 2700 | | | | | | |

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc



Mobile phone scan
can visit our official website