



## Rain Test Chamber

(IPX1/2/3/4)






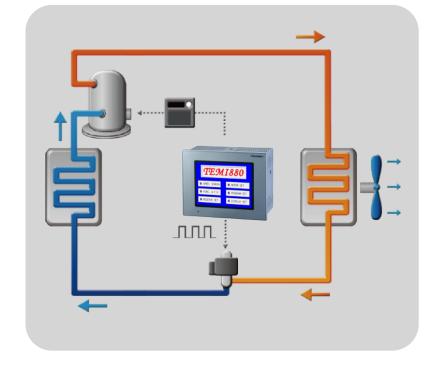

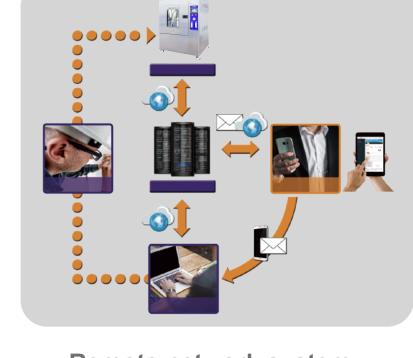

Remote network system

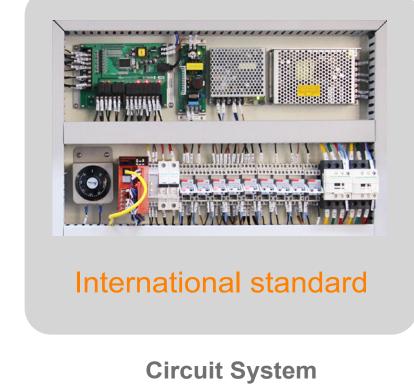















SANWOOD®

environmental test chambers



Specifications

Model		SM-IPX12-1000
Inner chamber material  D×W×H (mm)		1000*1000
Outer chamber material  D×W×H (mm)		1200*1450*1850
Performance index	Drip mold height	200~800mm (adjustable)
	Rainfall	<b>1000</b> 3~5mm/min
	Drip hole diameter enviro	nmental test chambers $\phi 0.4 mm$
	Testing bench size	500×400 (mm)
	Testing bench angle	The horizontal center faces from both sides to 45°
	Lifting mode	up and down
Operation Control System	Controller	SANWOOD SH-5500 controller
	Time controller	Imported programmable time computer integrated controller
	Water pressure control	Electromagnetic flowmeter
	Observation	Large area visualization toughened glass door
	Water supply system	Water tank, booster pump
	Power supply	AC380V TN-S
Safety protection		Leakage, short circuit, motor overheating

Model		SM-IPX34-1000
Testing room size		1000(W)*1000(H)*1000(D)
External size		1450(W)*1800(H)*1200(D)
Power		2.5(KW)
Performance index	Radius of Water spraying ring	400mm
	Water pipe diameter	SAMUOOD on the state of the sta
	Nozzle hole diameter	φ0.4mm
	Aperture spacing	50mm
	Swing amplitude	±45°、±60°、±90°、±180° (theoretical value)
	Rotating speed	1r/min can also be used for speed regulation without joints
Operation Control System	Controller	SANWOOD SH-5500 controller
	Time controller	Imported programmable time computer integrated controller
	Water pressure control	Electromagnetic flowmeter
	Observation	Large area visualization toughened glass door
	Water supply system	Water tank, booster pump
	Power supply	AC380V TN-S
Safety protection		Leakage, short circuit, motor overheating



ADD: No.88, Songchang Road, Songbotang, Changping, Dongguan, Guangdong TEL: +86+769-81182799

FAX: +86+769-82987199

www.sanwood.cc



